

Automatic Door Systems



TH-W3


使用說明

OPERATION INSTRUCTION

<http://www.kthtw.com>
e-mail: kth@kthtw.com

本公司另有以下各類自動門配備, 請洽本公司各經銷商
Our company has the following series of automatic door, please contact with our distributors/representations.


圓型門 Round type door

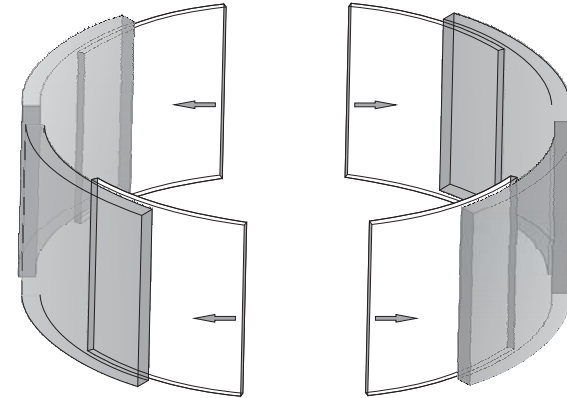

按裝方式請參考圓型門按裝說明

Installation: Please in accordance with the instruction of Round Type Door.

弧形門 Curved type door




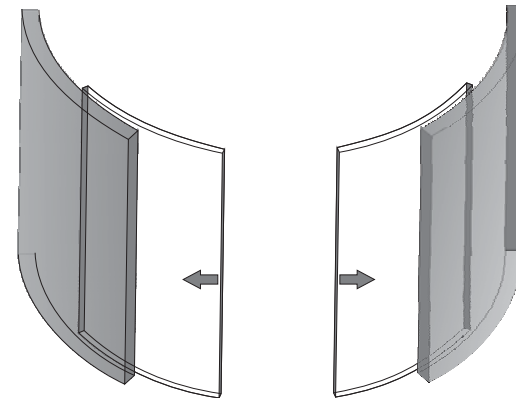


按裝方式請參考弧型門按裝說明




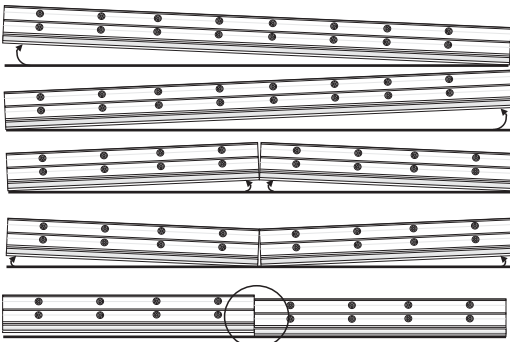
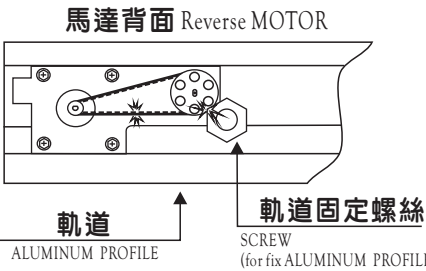
Installation: Please in accordance with the instruction of Curved Type Door.





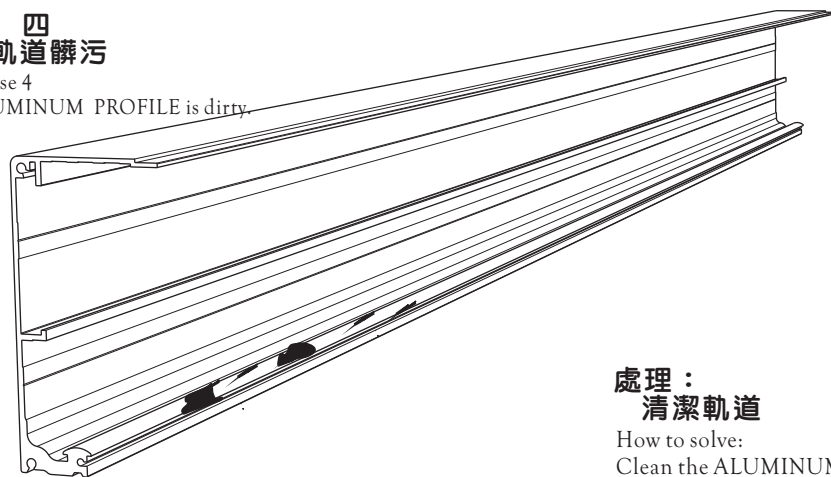


















1. 套件規格	COMPONENTS SPECIFICATION	P1
2. 產品規格	TECHNICAL SPECIFICATION	P2
3. 機械箱剖面圖	SECTIONAL DRAWING	P3
4. 機械箱高度圖	INSTALLATION DRAWING	P4
5. 按裝流程圖	INSTALL PROCEDURE	P5
6. 尾輪座按裝	INSTALL THE BELT ROLLER	P6
7. 吊滑輪位置圖	THE POSITION OF THE HANGING TWIN-WHEEL	P7
8. 皮帶按裝	INSTALL THE RACK BELT OF 2-WINGED	P8
9. 門扇調整	ADJUST THE DOOR-LEAF	P9
10. 電氣連接	CONNECTION	P10
11. 信號連接	OUTPUT CONNECT	P11
12. 測試及調整	TEST AND ADJUST	P13
13. 各調節旋鈕功能說明	ADJUSTMENT	P14
14. 故障檢查流程	BROKEN CHECKING	P16
15. 故障排除(繁體)		P17
16. TROUBLESHOOTING		P18
17. 故障排除(圖示)	TROUBLESHOOTING	P19*

狀況三 門扇運行有雜音 The Door-Leaf sends out abnormal noise in operating.

<p>原 一 吊輪螺絲鬆動</p> <p>Cause 1 The SCREW of the HANGING TWIN-WHEEL is loose.</p>  <p>處理： 重新將吊輪螺絲旋緊</p> <p>How to solve: Refasten the SCREW of HANGING TWIN-WHEEL.</p>	<p>原 二 吊輪損壞</p> <p>Cause 2 HANGING TWIN-WHEEL is broken.</p>  <p>處理： 更換吊輪</p> <p>How to solve: Replace a new one HANGING TWIN-WHEEL.</p>	<p>原 三 吊輪髒污</p> <p>Cause 3 HANGING TWIN-WHEEL is dirty.</p>  <p>處理： 清潔吊輪</p> <p>How to solve: Clean the HANGING TWIN-WHEEL.</p>
<p>原 四 軌道髒污</p> <p>Cause 4 ALUMINUM PROFILE is dirty.</p>  <p>處理： 清潔軌道</p> <p>How to solve: Clean the ALUMINUM PROFILE.</p>		





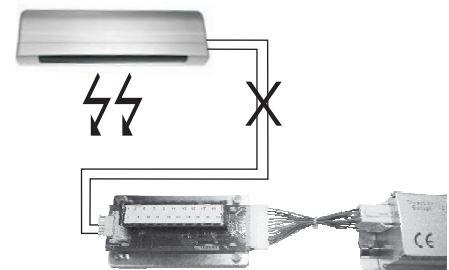
狀況二 門扇運行不順暢 Door-Leaf isn't smooth in operating.

<p>原 一 吊輪安裝未垂直 Cause 1 HANGING TWIN-WHEEL is not at vertical position.</p>  <p>處理： 重新調整吊輪 How to solve: Readjust the HANGING TWIN-WHEEL.</p>	<p>原 二 門扇與地軌有磨擦或地軌髒污 Cause 2 1. Door touches Ground Rail. 2. Ground Rail is dirty.</p>  <p>處理： 1. 調整門扇高度 2. 清理地軌的髒污 How to solve: 1. Readjust the distance between Door and Ground Rail. 2. Clean up the Ground Rail.</p>	<p>原 三 軌道未垂直 Cause 3 ALUMINUM PROFILE is not vertical.</p>  <p>處理： 重新調整軌道的垂直位置 How to solve: Readjust the vertical position of the ALUMINUM PROFILE.</p>
<p>原 四 軌道未水平 Cause 4 ALUMINUM PROFILE is not at horizontal position.</p>  <p>處理： 重新調整軌道的水平位置 How to solve: Readjust the level position of the ALUMINUM PROFILE.</p>	<p>原 五 軌道固定螺絲與馬達之轉輪或皮帶磨擦 Cause 5 SCREW of ALUMINUM PROFILE.</p>  <p>處理： 卸下馬達, 並重新調整該軌道固定螺絲的位置 How to solve: Unload the MOTOR, readjust the POSITION of SCREW.</p>	


 <p>微電腦控制器 MICRO-CONTROLLER</p>	 <p>直流無刷馬達及減速齒輪組 BRUSHLESS DC MOTOR</p>	 <p>齒型皮帶 RACK BELT</p>
 <p>門扇固定螺絲 (12個 三扇走單) DOOR SCREWS (12 pcs 3-winged)</p>	 <p>主被動板固定螺絲(3個三扇走單) SCREWS of ACTIVE (3 pcs 3-winged)</p>	 <p>小阻輪 (12個雙扇走單) BLOCK (12 pcs 3-winged)</p>
 <p>吊滑輪固定擋片(4個三扇走單) STOPER (4 pcs 3-winged)</p>	 <p>墊片(12個三扇走單) WASHER (12 pcs 3-winged)</p>	 <p>尾輪座 A BELT ROLLER A</p>
 <p>尾輪座一組 B BELT ROLLER B</p>	 <p>主動板 ACTIVE BRACE</p>	 <p>上主動板 UPPER ACTIVE BRACE</p>
 <p>下主動板 LOWER ACTIVE BRACE</p>	 <p>外層門扇主動板 OUTSIDE door-leaf ACTIVE BRACE</p>	 <p>皮帶夾 (4個三扇走單) BELT FIXER(3 pcs 3-winged)</p>
 <p>內層門扇吊滑輪組(右側) Inside door-leaf HANGING TWIN-WHEEL(right side)</p>	 <p>中層門扇吊滑輪組 (1組 三扇走單) MIDDLE door-leaf HANGING TWIN-WHEEL (1set 3-winged)</p>	 <p>皮帶中央支撐板 BELT BRACE</p>
 <p>內層門扇吊滑輪組(左側) Inside door-leaf HANGING TWIN-WHEEL(left side)</p>	 <p>電線固定座 5 個 WIRE CLAMP-5 PCS</p>	
 <p>紅外線感應器(選配) SENSORS (OPTIONAL DEVICE)</p>	 <p>門扇吊板 (6個 三扇走單) Hanging Brace (6pcs 3-winged)</p>	 <p>外層門扇吊滑輪組 (1組 三扇走單) Outside door-leaf HANGING TWIN-WHEEL (1set 3-winged)</p>


型號 TYPE	TH-W3
種類 MODEL	三扇走單向式 Telescopic 3-winged
門扇重量 DOOR WEIGHT	80kg X3扇(door)
門扇寬度 DOOR WIDTH	DW=500mm~3000mm
按裝方式 INSTALL WAY	表面按裝 Surface install
馬達 MOTOR	DC24V 75W 直流無刷馬達 DC24V 75W BRUSHLESS DC MOTOR
控制器 CONTROL	微電腦化處理機控制器 STANDARD MICRO-CONTROLLER
消耗電量 POWER CONSUMPTION	75W
電源電壓 VOLTAGE	AC100V~240V皆可 (either AC100V~240V)
環境溫度 ENVIRONMENTAL TEMPERATURE	-20°C~+50°C
噪音量 VOLUME	最大 60 分貝 60decibel(max.)
開啟速度 STARTING SPEED	650mm/秒(second)
開啟時間 STARTING TIMES	可調 0 秒至 20 秒 0~20 sec. (regulable)
傳動要件 TRANSMISSION IMPORTANT CONDITION	齒形皮帶 S8M RACK BELT
開門幅度 OPENING DOOR RANGE	全開/半開 可調整距離 FULL/HALF-OPEN (regulable)
PFC 功率因素 POWER EFFICIENCY	0.95(AC100V全載時/in AC100V Full load)
手推開啟力量 TRACTION FORCE	3 kg

狀況一 門扇無法開啟或關閉 Door can't be opened or closed.

<p>原 一 門扇上方與橫樑接觸 Cause 1 Above the Door-Leaf touched with the crossbeam.</p>  <p>處理： 調整門扇與橫樑間隙 How to solve: Adjustment the interval between the Door-Leaf height and Crossbeam.</p>	<p>原 二 門扇與地軌接觸 Cause 2 The Door-Leaf touched with the Ground Guide Rail.</p>  <p>處理： 調整門扇高度 How to solve: Adjust the Door-Leaf height.</p>	<p>原 三 門扇脫軌 Cause 3 Door-Leaf derails the ALUMINUM PROFILE.</p>  <p>處理： 重新將門扇置入軌道 How to solve: Put the Door-Leaf into the ALUMINUM PROFILE again.</p>
<p>原 四 門扇未垂直 Cause 4 Door-leaf is not vertical.</p>  <p>處理： 調整地軌位置 How to solve: Adjust the Ground Guide Rail/Wheel position.</p>	<p>原 五 感應器故障或未接線至集線器 Cause 5 SENSOR is broken or disconnects to the COMBINED TERMINAL BLOCK.</p>  <p>處理： 1. 若感應器故障則更換新的感應器 2. 檢查感應器是否連接至集線器 How to solve: 1.If SENSOR is broken please change a new one. 2.Check SENSOR whether it connects to the COMBINED TERMINAL BLOCK.</p>	

PROBLEMS	REASONABLE	CHECK	HOW TO SOLVE
DOOR CAN'T BE MOVED.	1.No power.	Broken circuit.	Check the broken circuit position.
		The Power Switch is not opened.	Open the POWER SWITCH.
	2.The door is locked.	Door is locked and no movement action.	Open the DOOR LOCK.
3.The sensor is broken.	3.The sensor is broken.	Signal light is WORKING.	Check the MICRO-CONTROLLER.
		Signal light is OUT OF WORKING.	Check the CIRCUIT OF SENSOR or change a new one SENSOR.
SPEED	1.Speed is too slow.	Check the Speed at KNOB of MICRO-CONTROLLER.	Adjust the Speed of Open/Closed Door.
	2.Door runs into the obstructor, then cause the Door moving slow.	Installation problem or dirty.	Reinstall or clean the ALUMINUM PROFILE.
	3.Door is difficult to move.	Turn off the power.Use hand to move the Door, besides, check the Ground Guide Rail whether it is dirty.	Clean the Ground Guide Rail.
		Check the HANGING TWIN-WHEEL whether it is broken.	Change a new one.
		Check the Door Bolt in the door bottom whether it is loosen.	Fix the Door Bolt.
	Check whether the Ground Wheel is broken.	Change a new Ground wheel.	
DOOR CAN'T FULL OPEN.	In the Half-Open way.	Check the Knob/Switch.	Turn on to Full Open.
DOOR CAN'T CLOSE.	1.In the Full-Open way.	The SENSOR keeps working.	Check wiring or change a new SENSOR.
	2.The Door opens suddenly while it is moving to close .	The SENSOR probably is installed with something wrong.	Adjust the SENSOR or change a new one.


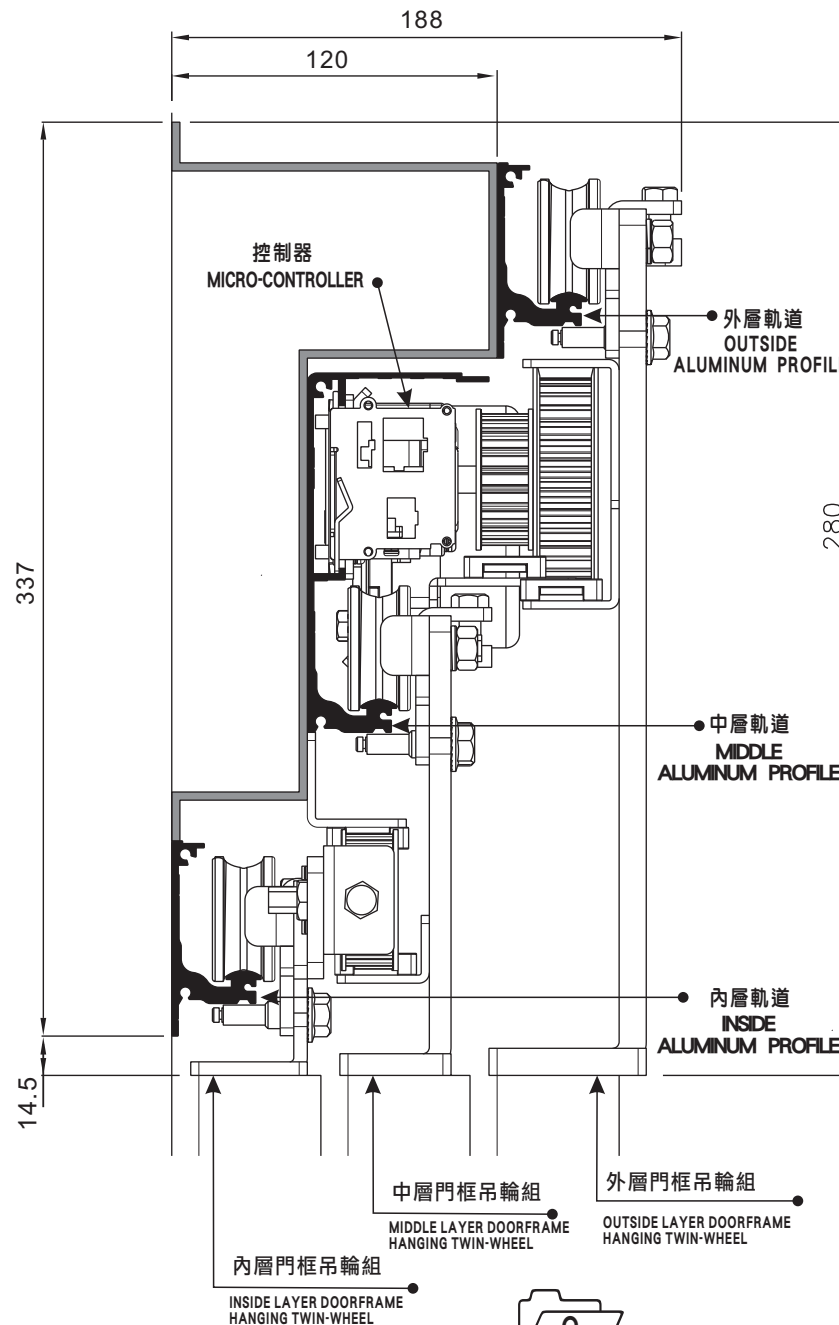


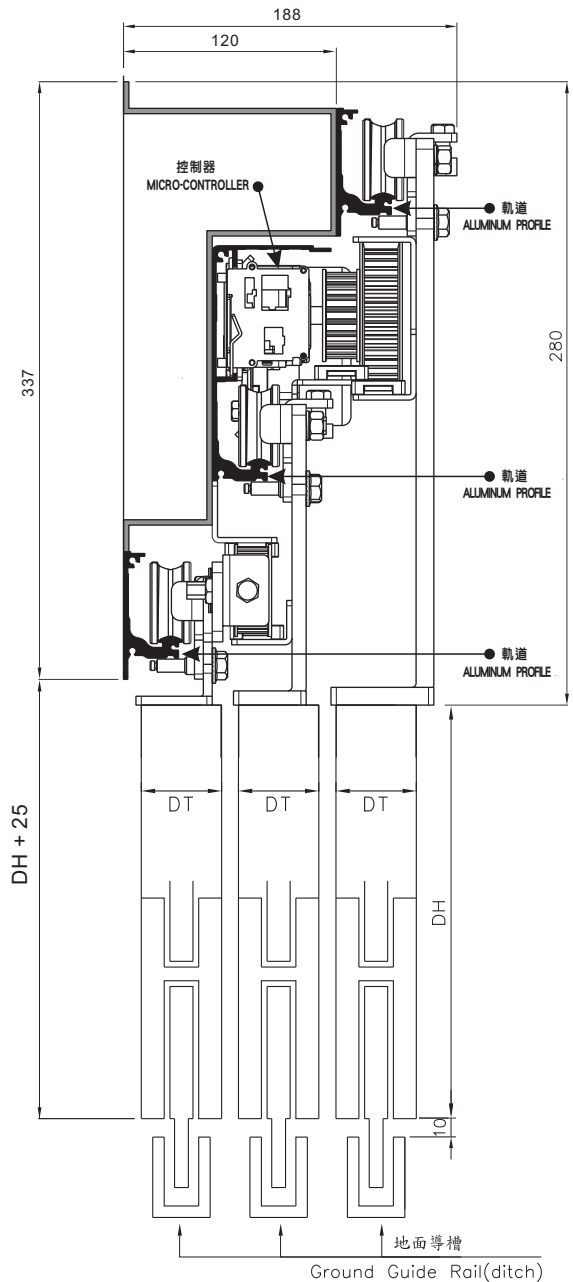


單位：公釐
 MEASURE: mm
 DH=門扇高度
 DH=Door height
 DT=門扇厚度
 DT=Door thickness

若門扇高度為2300mm,
 則立機箱高度為2325mm
 If the height of the Door-Leaf is
 2,300mm, then the total height of the
 ALUMINUM PROFILE is 2,325mm.

問題	可能原	檢查方向	排除操作
無開門動作	1. 無電源	電路斷路	檢查電路斷點
		電源開關未開	開啟電源開關
	2. 門被鎖住	門鎖鎖住，控制器無動作	開啟門鎖
3. 感應器故障	感應信號燈有動作	檢查控制器	
	感應信號燈無動作	檢查感應器線路或更換感應器	
速度太慢	1. 速度設置太慢	控制器速度調整	調整開門或關門速度
	2. 門扇遇到阻礙物，變成慢速	軌道施工不良或髒污	重新施工或清理軌道
	3. 門扇滑動阻力過大	關閉電源，用手使門滑動並檢查地面導軌是否有髒污	清理地面導軌
		吊滑輪磨損	更換吊滑輪
		檢查門扇底部的鎖門是否鬆動	固定好鎖門
		檢查地面導輪是否已損壞或鬆動	更換或重新固定地面導輪
門扇開不到底	處於半開模式	檢查全開/半開開關	切換至全開
門扇不能關閉	1. 門扇處於全開狀況無法關閉	感應器信號燈持續亮著	感應器線路檢查或更換感應器
	2. 門扇關到一半隨即開啟	感應器誤動作	調整或更換感應器

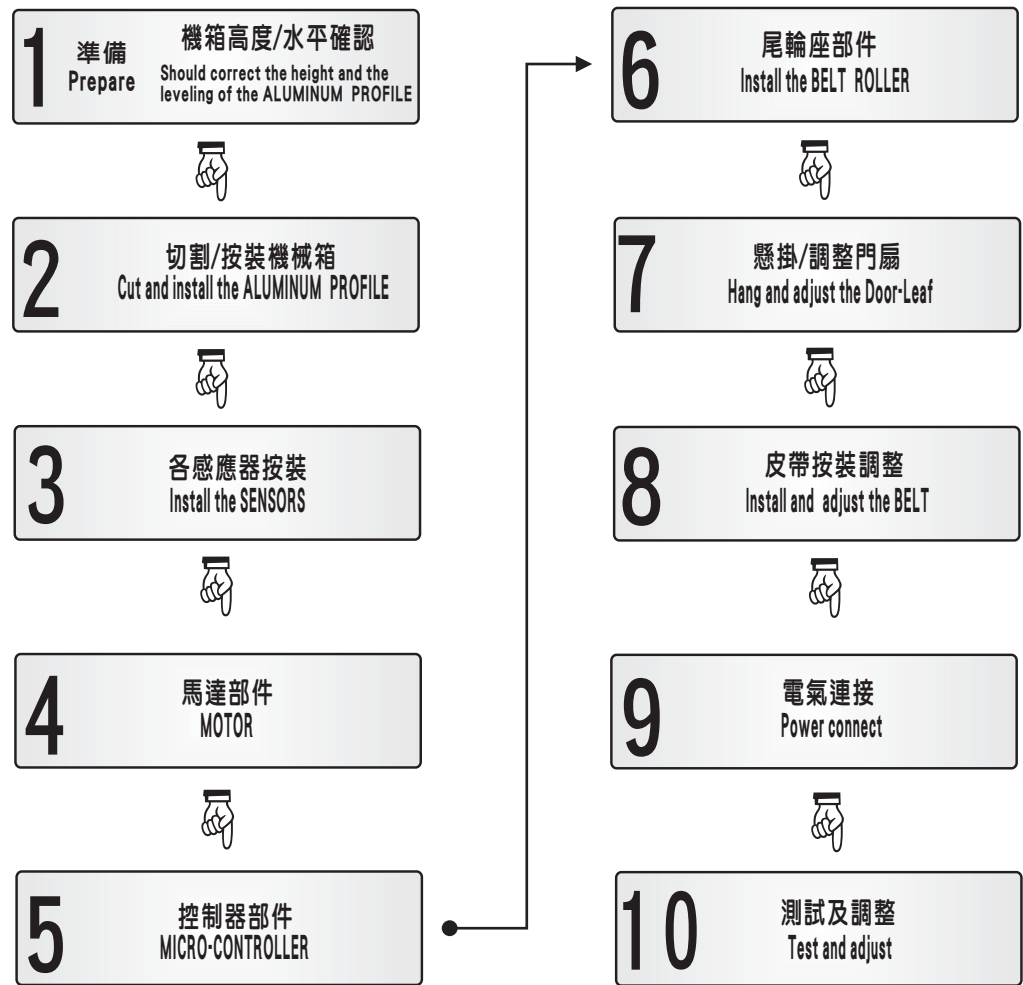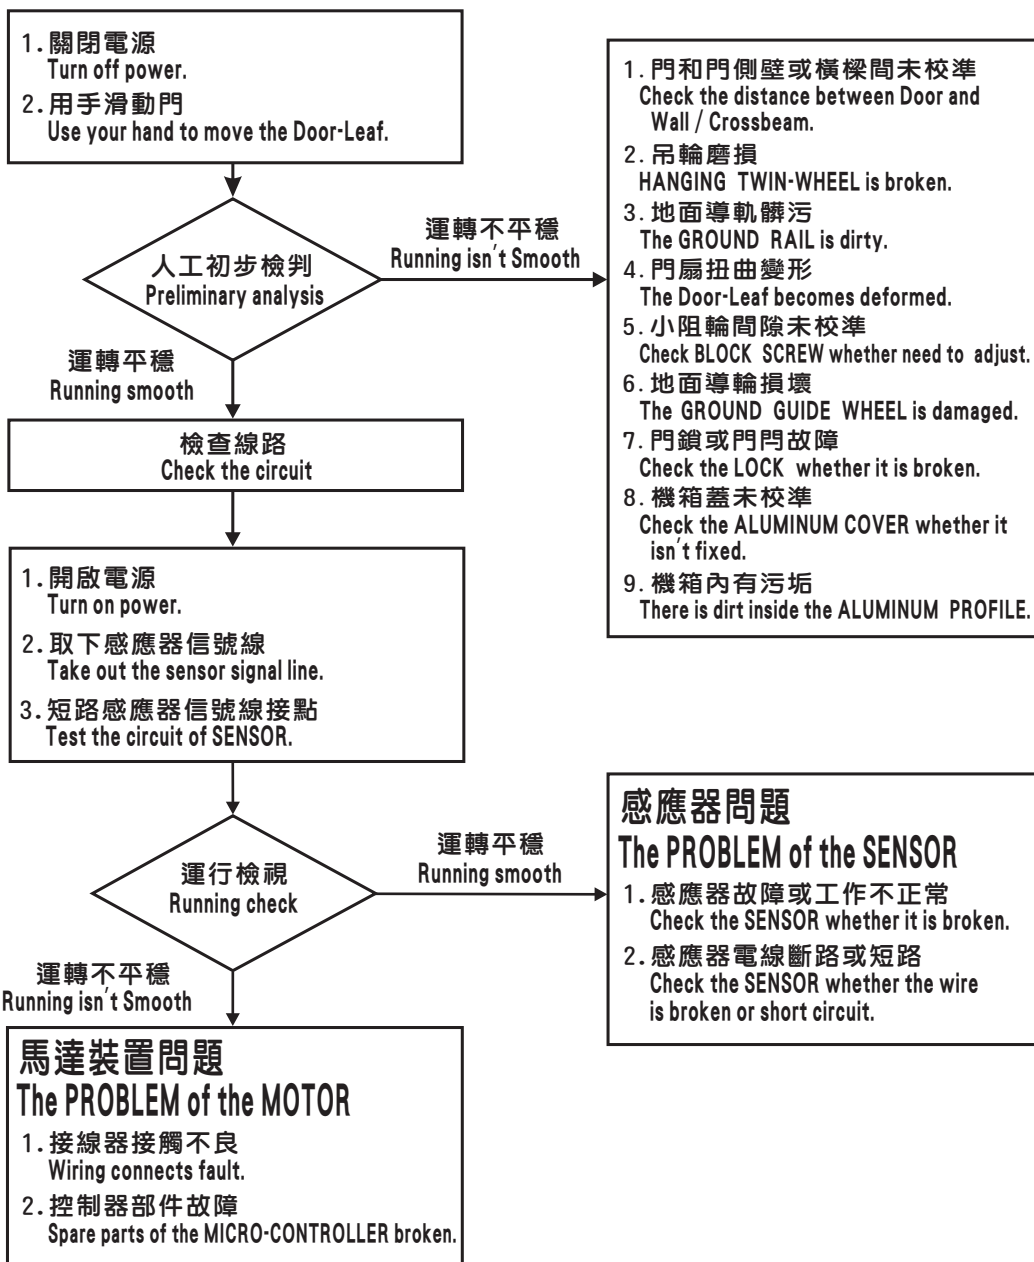

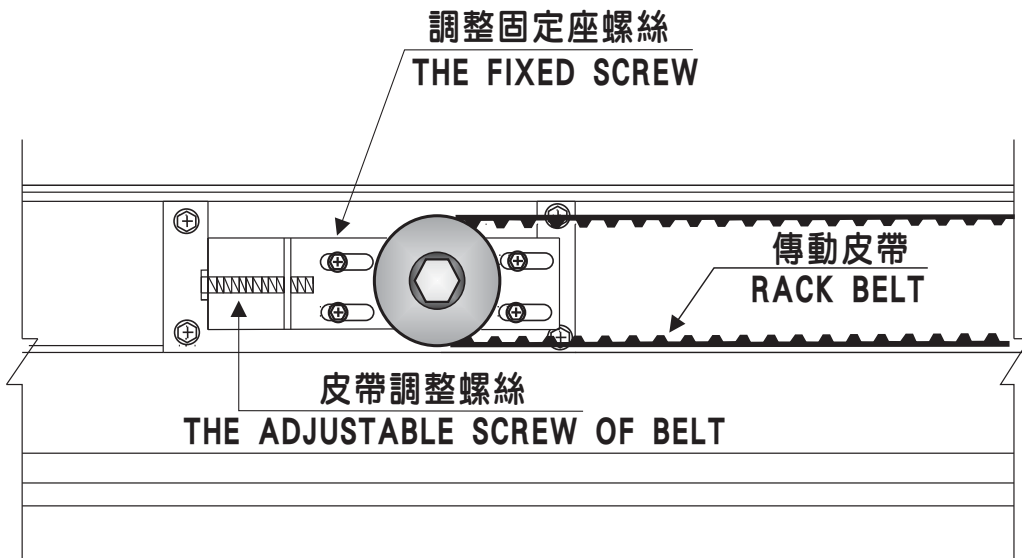

皮帶張力可由皮帶調整螺絲做調整，調整完畢後，須擰緊調整固定座螺絲。

TENSION of BELT can be adjusted by the ADJUSTABLE SCREW of BELT, after that, must tighten the FIXED SCREW of BELT.



E 關門速度調節旋鈕 The closing speed of the door

可調整門扇關閉時行進速度，數字越大，速度越快。初始調整時，請將數字由小而大，逐次調整。

Adjust the CLOSED SPEED
Higher number, faster speed.

CAUTION: please adjust the number one by one from low to high.



F 關門慢速距離調節旋鈕 The slowing range of closing door

可調整門扇關閉時慢速距離，數字越大，距離越長。初始調整時，請將數字由大而小，逐次調整。

Adjust the SLOW RANGE of CLOSED DOOR

Higher number, more range about the slow range at open door position.

CAUTION: please adjust the number one by one from high to low.



G 慢速速度調節旋鈕 The slowing speed of the door

當門扇慢速行進時，可調整慢速速度，數字越大，速度越快。初始調整時，請將數字由小而大，逐次調整。

Adjust the SLOW SPEED
Higher number, faster speed.

CAUTION: please adjust the number one by one from low to high.



H 開放時間調節旋鈕 Opening hold time

調整門扇開放時間，數字越大，門扇停留時間越長，在最小(0)秒和最大(20)秒之間調整。

Adjust the HOLD OPEN TIME

Higher number, the hold time is longer.

NUMBER	0	1	2	3	4	5	6	7	8	9
SECOND	0	1	2	3	4	5	6	10	15	20



A 半開位置調節旋鈕 Full/Half opening

全開/半開接點ON時，半開功能隨即動作，此時可藉由調節旋鈕設定門扇開啟位置，數字越大，開啟幅度越寬。

Adjust the RANGE of the HALF OPEN DISTANCE.
Higher number, wider range.



B 煞車力調節旋鈕 Brake power

門扇開啟時，其煞車力量可自由調整，門扇較輕時，所需煞車力較小；門扇較重時，所需之煞車力相對較大。可由調節旋鈕調整煞車力至適當大小。當門扇重量小於50kg時，請調於0~2。

The Door-Leaf is slight, the BRAKE POWER is less.
Please choose 0~2 if the Door-Leaf is under 50kg.
Please adjust number from number 5 if the Door-Leaf is over 80kg.



C 開門速度調節旋鈕 The opening speed of the door

可調整門扇開啟時行進速度，數字越大，速度越快。初始調整時，請將數字由小而大，逐次調整。

Adjust the OPEN SPEED
Higher number, faster speed.
CAUTION: please adjust the number one by one from low to high.



D 開門慢速距離調節旋鈕 The slowing range of opening door


可調整門扇開啟時慢速距離，數字越大，距離越長。初始調整時，請將數字由大而小，逐次調整。

Adjust the SLOW RANGE of OPENING DOOR
Higher number, more range about the slow range at open door position.
CAUTION: please adjust the number one by one from high to low.


三扇走單向 TELESCOPIC 3-WINGED SLIDING DOORS

尾輪座 A 安裝於中層軌道上
INSTALL BELT ROLLER A ON THE MIDDLE ALUMINUM PROFILE

尾輪座 A 安裝於中層軌道上
INSTALL BELT ROLLER A ON THE MIDDLE ALUMINUM PROFILE

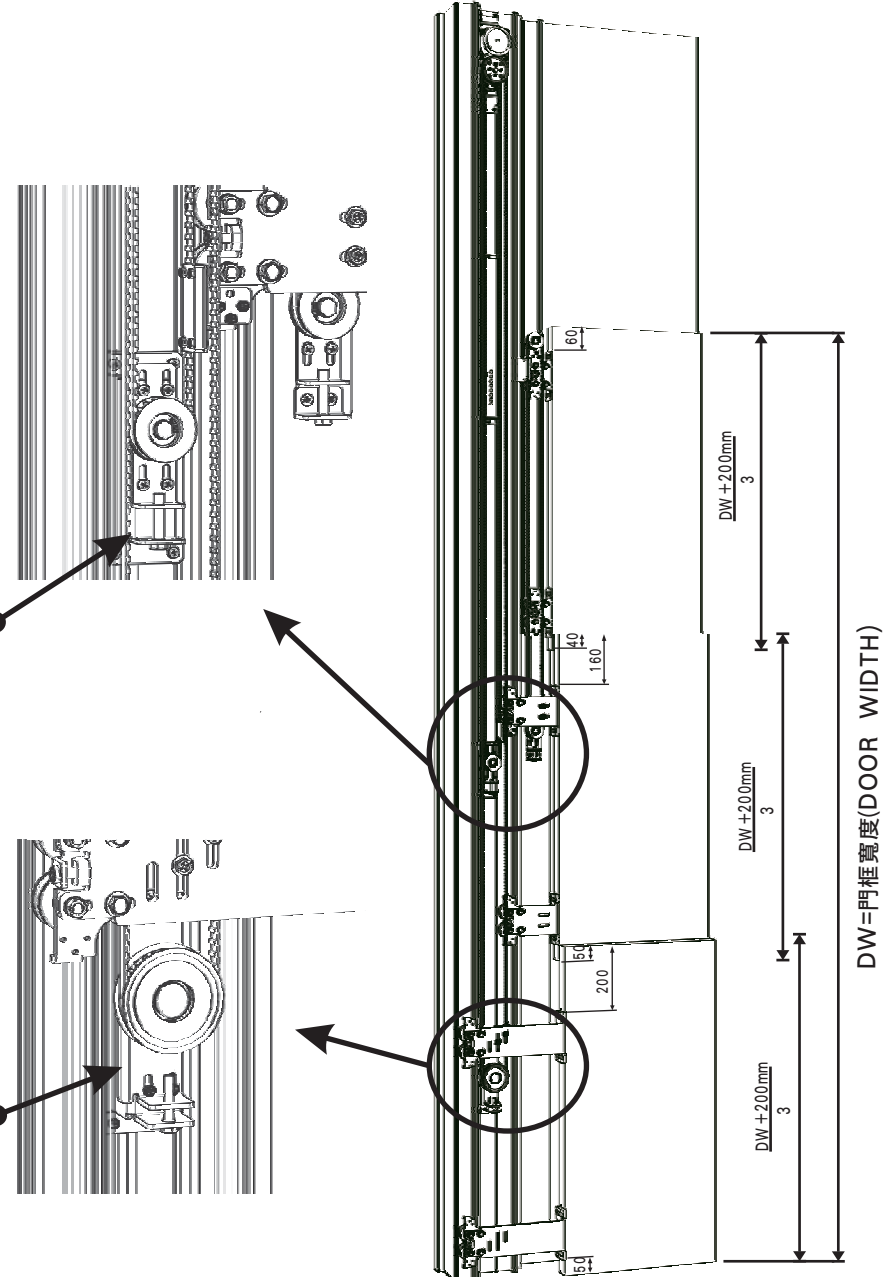

DW=門框寬度(DOOR WIDTH)

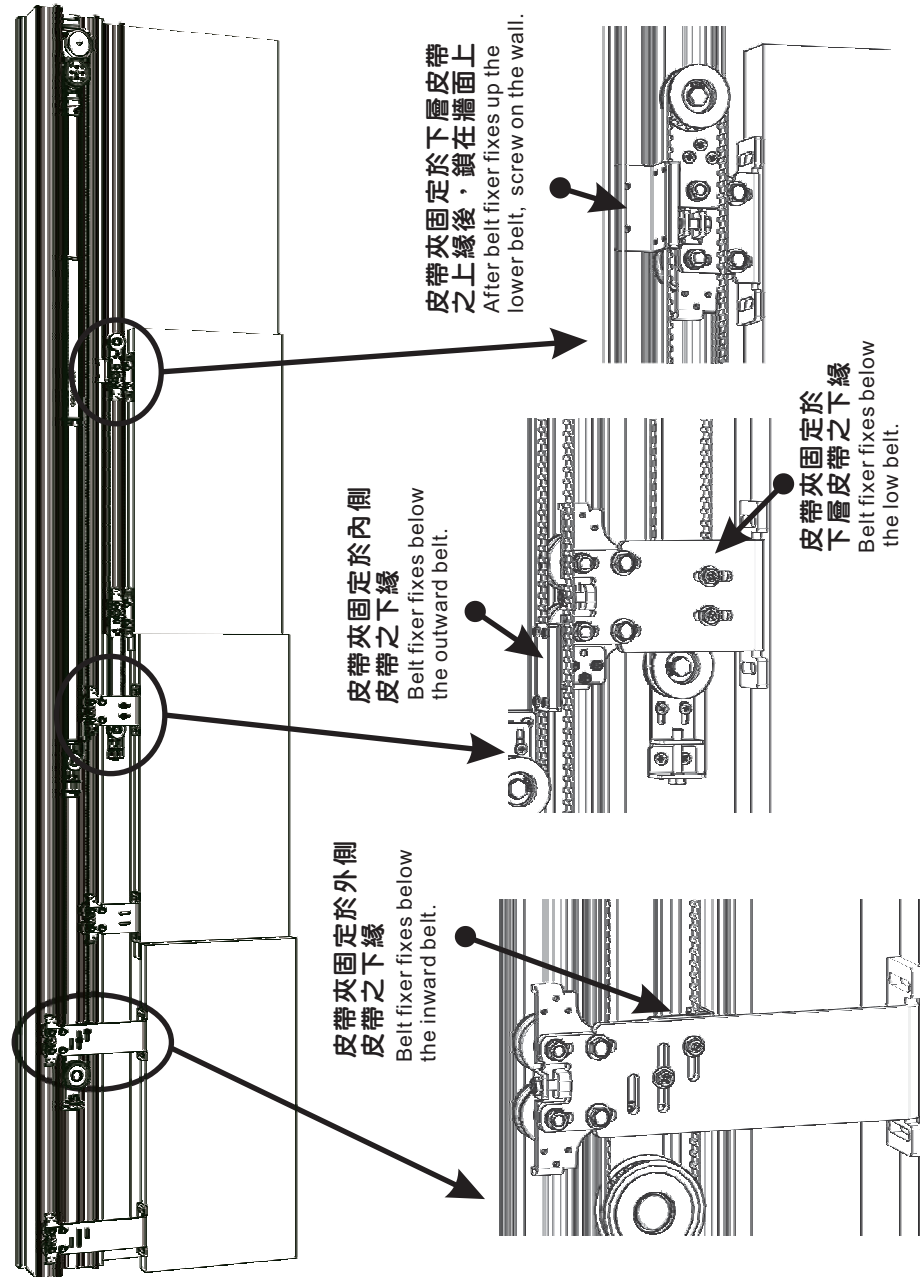

電源開關開啟前，先手動開門和關門，確認門扇能夠平滑移動，並確認電氣連接無誤後，方可供電。


Before turn on the power, make sure the Door-Leaf can be smoothly moved, and the electric link is correct at first.

1.系統行程記憶 SYSTEM PROGRAM REMEMBER

當電源開啟後，控制系統從門的關閉位置至開啟位置低速行進，確認並記憶行程距離，經由內部微電腦處理器自動設定後，門扇關閉位置即予以固定。

After turn on the power, the MICRO-CONTROLLER will remember the distance and the range.

2.調整 ADJUST

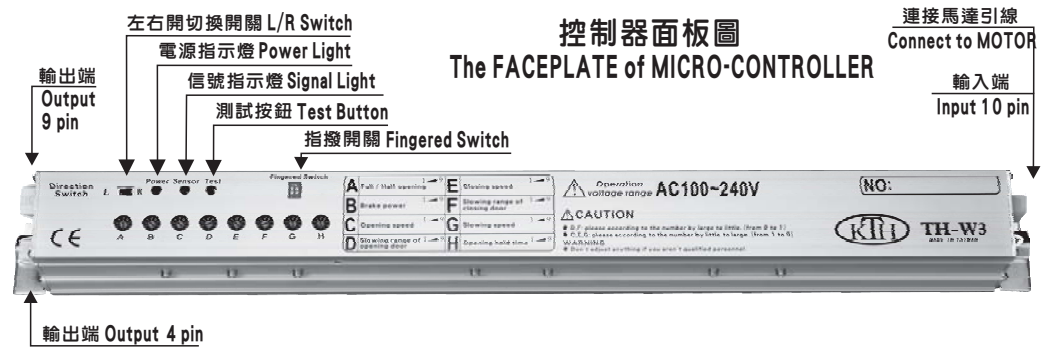

紅色LED-電源指示燈，電源開啟後，LED燈亮，指示電源已接通。

Red LED-Power is connected.

綠色LED-信號指示燈，當開門信號輸入時，LED燈亮，表示信號輸入。

Green LED-Input the open door signal.

L/R-左右開切換開關。

L/R switch-The direction of the door opening: right/left(R/L).

指撥開關-Pin 1 - 定向開關

- 操作方式
- ➔ OFF: 正常模式
 - ➔ ON: 系統模式為按一下開門，再按一下關門。

指撥開關-Pin 2-反向開關:為了控制停電再復電後的門扇開關方向。

- 操作方式
- ➔ OFF(正常模式): 停電再復電後，門扇先執行開門動作。
 - ➔ ON(適合保全系統): 停電再復電後，門扇先執行關門動作。


Fingered Switch- Pin 1 - Directional Function

- Operation
- ➔ OFF: Normal mode.
 - ➔ ON: push once, open the door. Push again, close the door.

Fingered Switch- Pin 2- Reverse Switch: in order to control opening and closing direction of the Door-Leaf after power resumes.

- Operation
- ➔ OFF: Normal mode, after power resumes, the Door-Leaf opens the door first.
 - ➔ ON: suitable for Security System, after power resumes, the Door-Leaf closes the door first.

TH-100集線器接線示意圖 (選配)
TH-100 Wiring diagram (Optional Device)

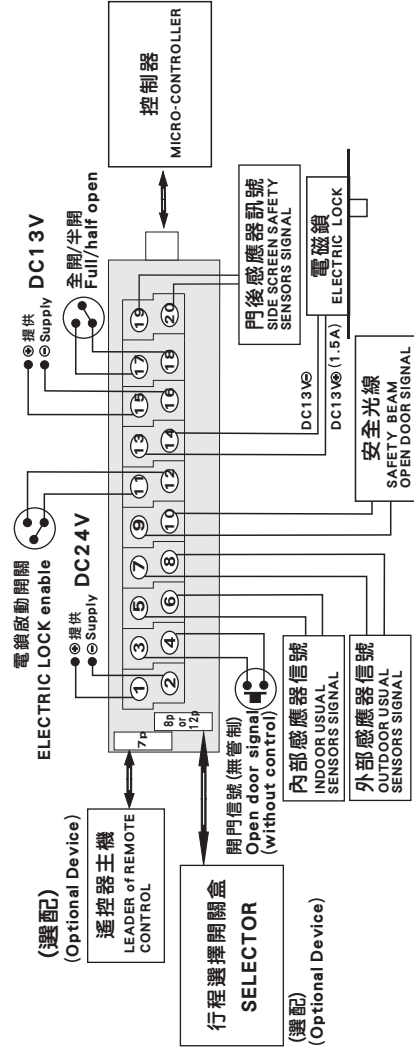

(A) 11號與12號端子短路時，電鎖功能隨之啟動且當門扇關閉後，13號與14號端子輸出DC13V供電磁鎖使用。若是11號與12號端子沒有短路，則13號與14號端子不會輸出DC13V。
The FUNCTION of the ELECTRIC LOCK will work when ⑪ and ⑫ are short circuit. then ⑬ and ⑭ will output DC13V for ELECTRIC LOCK after the door closes. ⑬ and ⑭ will not output DC13V if ⑪ and ⑫ are not short circuit.

(B) 9號與10號端子做為安全光線信號控制；當門扇開啟或運行中，9號與10號端子保持在接受信號狀態中，當門扇關閉後則9號與10號端子變成不接收信號，安全光線隨即關閉，保持門禁。


The SIGNAL of the SAFETY BEAM is controlled by ⑨ and ⑩. When door is opening and running, ⑨ and ⑩ keep to accept the signal, then the SAFETY BEAM will be working. ⑨ and ⑩ will not work when the door is closed, then the SAFETY BEAM will lose efficacy when the door is closed.

(C) 當行程選擇開關盒啟動時，內部與外部感應器信號會依照行程選擇開關功能而動作，以保持門禁功能。若有另外信號輸入(門禁系統、按鈕...)請把信號接至3號與4號端子。


Please according with the connection way if it was installed "Selector", "Remote", "Sensors of inside and outside" at the same time; The entrance guard is under controlled by "Selector", furthermore, please extra contact ③ and ④ for the open door signal of "without control". eg. Extra install a BUTTON or CARD READER....

(D) 門後感應器是為避免門在開啟時後方有物體或行人進入而發生碰撞其接點訊號接於 ⑯、⑰ 二點，當訊號觸發時移動中的門扇會即刻變慢運行，到門完全開啟再以正常速度關閉。

The signal of Side Screen Safety Sensor is controlled by ⑯ and ⑰. Side Screen Safety Sensors are placed at the rear end of the door to prevent collisions during the opening movement of the moving leaves. When the signal activates, the moving leaves will become slowly, till the door opens fully, then close normally.

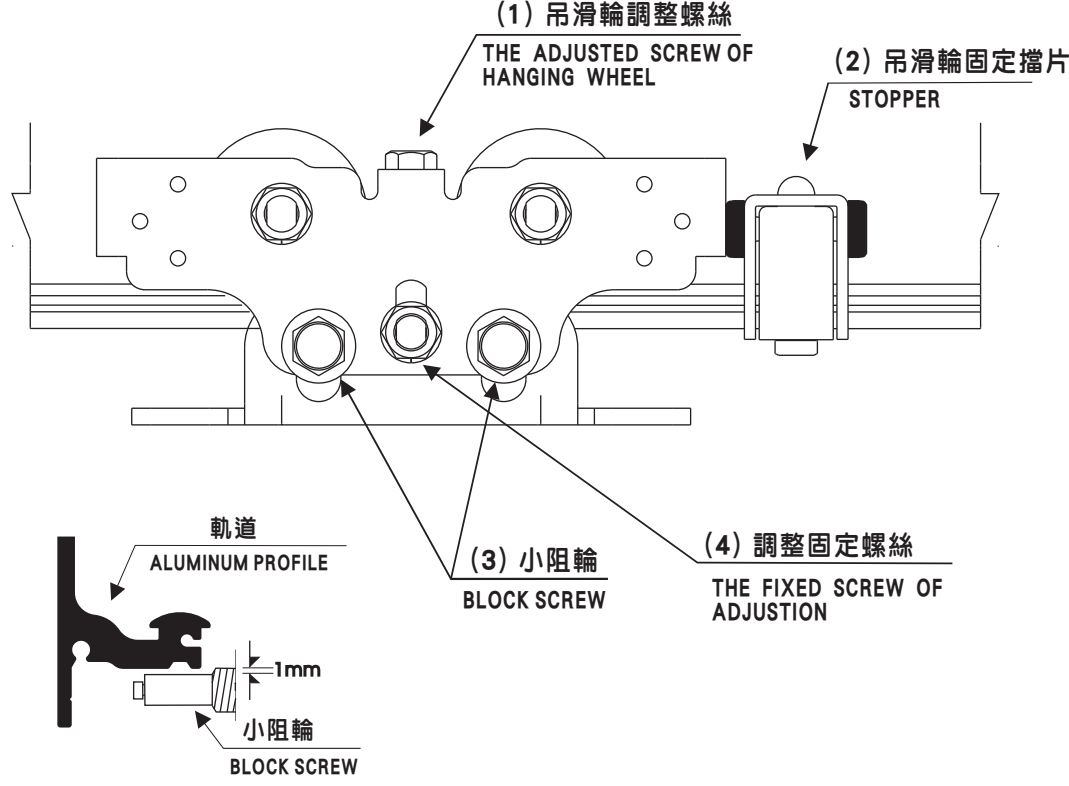

- A** 當門扇的高度與間隙需調整時，首先鬆開小阻輪與調整固定螺絲，旋轉吊滑輪調整螺絲。
When Door-Leaf height and interval need to adjust, loose (3) & (4) at first, then adjust (1).
- B** 調整完畢後，必須擰緊小阻輪與調整固定螺絲。
Need to fasten (3) & (4) after adjust **A**.
- C** 門扇開關位置確認後，按置吊滑輪固定擋片，確保開門位置不變。
Install above-mentioned (2) after make sure the DOOR OPEN POSITION.

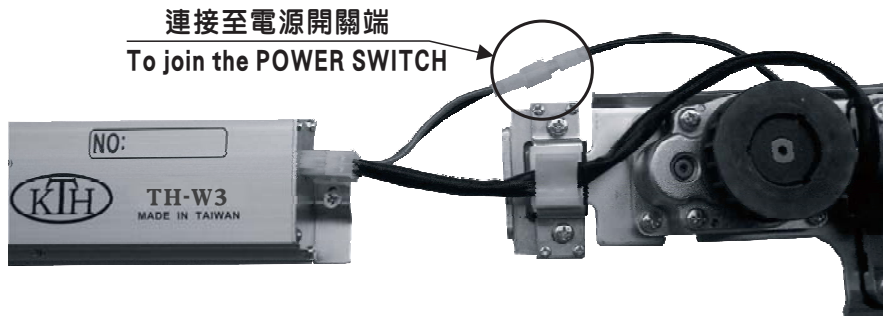


連接至電源開關端
To join the POWER SWITCH

控制器與馬達連接示意圖
The ILLUSTRATED of CONTROLLER and MOTOR.

供給電源輸入端
AC100V~240V皆可

Power supply (input)
Either AC100V~240V

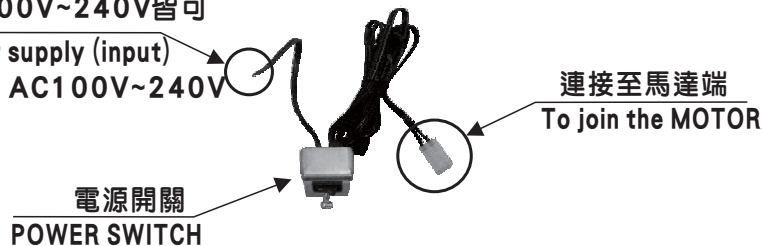

連接至馬達端
To join the MOTOR

電源開關
POWER SWITCH

警告
Warning

請確認感應器所標示之電壓是否與供給電源相同，若與供給電源電壓不同時，則感應器需另行加裝變壓裝置否則感應器極易燒毀，連接完畢後，請再確認一次。

Please confirm WHETHER the SENSOR VOLTAGE is the same as the power supply. If different between them, need to add the TRANSFORMER, otherwise the SENSOR would be burned.

輸出端引線 Output connect


9P 插頭
9P terminal

黑 Black	紅 Red	橙 Orange
黃 Yellow	綠 Green	藍 Blue
紫 Purple	灰 Gray	

4P 插頭
4P terminal

黑 Black	紅 Red
橙 Orange	橙 Orange

微電腦控制器
MICRO-CONTROLLER

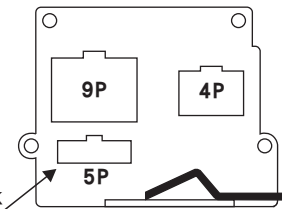


連接至集線器
Connect to Terminal Block

- 紅 Red DC13V⁺ 輸出DC13V 1.5A 供電磁鎖用
Output DC13V 1.5A for ELECTRIC LOCK use
- 黑 Black GND 〇
- 藍 Blue 門扇關閉時，輸出NC接點
Output NC signal
- 綠 Green
- 橙 Orange 電鎖啟動開關接點
ELECTRIC LOCK enable
- 黃 Yellow
- 灰 Gray 全開/半開接點
Full/Half opening signal
- 紫 Purple

- 紅 Red DC24V⁺ 感應器電源
Power of SENSOR
- 黑 Black GND 〇
- 橙 Orange 感應器信號端子
The signal of SENSOR
- 橙 Orange

註：5P 插頭僅供連接用，無法單獨接線使用。
PS: 5P terminal is required using with Combined Terminal Block.

電磁鎖接線示意圖
The illustration of the ELECTRIC LOCK contact

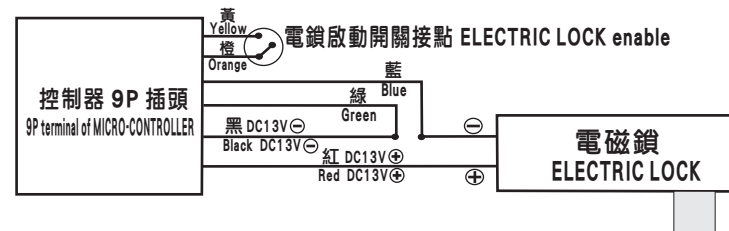

注意：在橙黃兩線短路時，藍綠兩線才會輸出NC接點。
PS: After the orange and the yellow lines are short circuit, the blue and the green lines would output NC signal.